

600W
SD-UPGR-600-G3

1000W
SD-UPGR-1000-G3

1200W
SD-UPGR-1200-G3

600W UPGRADE KIT

FOR
BALLOON LIGHT
400W PRO

UPGRADE TO
87,000
LUMEN

4x
50W
PANEL



87,000 – 145,000 – 174,000
LUMEN



5,700K
DAYLIGHT
COLOR



50,000
LASTING
HOURS



90-150
VOLT

LIFETIME WARRANTY

1200W UPGRADE KIT

FOR
BALLOON LIGHT
800W PRO

UPGRADE TO
174,000
LUMEN

8x
50W
PANEL

1000W UPGRADE KIT




FOR
BALLOON LIGHT
800W PRO

UPGRADE TO
145,000
LUMEN

4x
50W
PANEL



SPECIFICATIONS



600W

SD-UPGR-600-G3

FOR
BALLOON LIGHT

400W PRO

1000W

SD-UPGR-1000-G3

FOR
BALLOON LIGHT

800W PRO

1200W

SD-UPGR-1200-G3

FOR
BALLOON LIGHT


800W PRO

Voltage:	AC 90–150V
Frequency:	50 / 60 HZ
Power Consumption:	200W
Operating Temperatures:	-30–130°F
Panels:	4 × 50W panel
Luminous Flux:	29,000 lm
Color Temperature:	5,700K
Illumination Radius:	160ft
Sq Ft of Illumination:	80,425 sq ft
Lamp Life:	50,000 hours
IP Rating:	IP 65
Weight:	29.1 lb (combined)
Warranty	Lifetime Limited Warranty


Voltage:	AC 90–150V
Frequency:	50 / 60 HZ
Power Consumption:	200W
Operating Temperatures:	-30–130°F
Panels:	4 × 50W panel
Luminous Flux:	29,000 lm
Color Temperature:	5,700K
Illumination Radius:	240ft
Sq Ft of Illumination:	180,956 sq ft
Lamp Life:	50,000 hours
IP Rating:	IP 65
Weight:	41.8 lb (combined)
Warranty	Lifetime Limited Warranty

Voltage:	AC 90–150V
Frequency:	50 / 60 HZ
Power Consumption:	400W
Operating Temperatures:	-30–130°F
Panels:	8 × 50W panel
Luminous Flux:	58,000 lm
Color Temperature:	5,700K
Illumination Radius:	250ft
Sq Ft of Illumination:	196,350 sq ft
Lamp Life:	50,000 hours
IP Rating:	IP 65
Weight:	45.7 lb (combined)
Warranty	Lifetime Limited Warranty


POLAR DIAGRAM

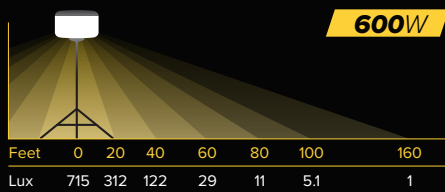

Light on tripod at 9 feet

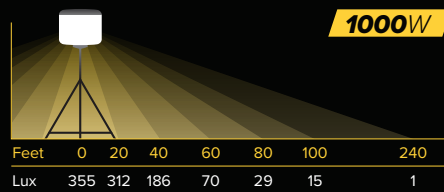

Light on tripod at 12 feet

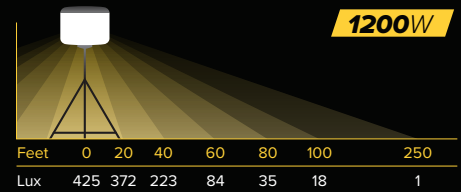

Light on tripod at 12 feet



SeeDevil

Control your light
with SeeDevil App



DESIGNED IN THE USA

MADE IN CHINA